

# HYDRON INCORPORATED

## HYDRAULIC COUPLINGS

### FIRG Series Flat Face

- Flat faces for easy wiping before connection
- **Guaranteed** against leaks for one year from date of purchase
- Easy one-handed connection & disconnection
- Bi-directional operation
- Rated at 5000 psi
- Male coupling seal design protects O-ring




HYDRAULIC  
TOOLS &  
ACCESSORIES

FIRG Basic Code	38 Coupling Size	- NPT Thread Type	- 3/8 Thread Size	- C Coupling Part	- H Sleeve
FIRG	3/8" or 1/2"	SAE - SAE (ORB) NPT - National Pipe Thread	3/8" or 1/2"	M - Male half only F - Female half only C - Complete coupling	H - Heavy Duty (standard) T31 - Thin Sleeve

### FBIR Series FIRG/ISO Coupling Adapters

This coupling adaptor enables the user to connect hydraulic attachments fitted with non-flat face ISO style couplings to the flat face couplings now being supplied on many different mobile vehicles such as skid steer loaders.

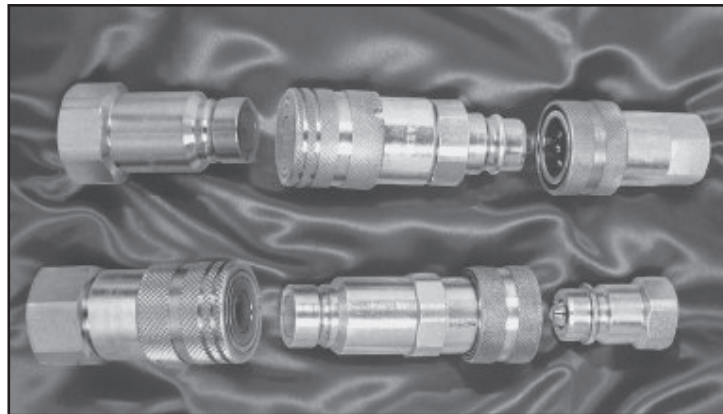

No.	Description	No.	Description
FBIR810	3/4" FIRG male / 1/2" ISO.A female	FBIR811	3/4" FIRG female - 1/2" ISO.A male

### CPQ Series Connect Under Pressure Couplings

Holmbury CQP Series Connect Under Pressure Male Couplings are the first push together coupling that will connect with high pressure (up to 5000 psi) in the male half without releasing any fluid to the environment.

- Warranted against leaks for one year from date of purchase

No.	Description
CQP38NPT38M	Male Coupling - 3/8" NPT Thread
CQP38NPT12M	Male Coupling - 1/2" NPT Thread



\*For other manufacturers please contact us for part numbers.

**320 Libbey Industrial Parkway, Weymouth, Massachusetts 02189**  
**Phone 781-331-5500 • Fax 781-331-5508 • www.hydroninc.com**