


HYDRON INCORPORATED



BUCK SQUEEZE WOOD POLE FALL PROTECTION SYSTEM

The BuckSqueeze Wood Pole Fall Protection System* fall protects line personnel from the ground to the elevated work position and back to the ground!

Benefits include:

- Wood pole fall protection during ascent and descent.
- Fall protection while climbing over obstacles.
- Ease of adjustment for the distance from the pole.
- Ease of adjustment for the diameter of the pole while ascending or descending.
- Rollers on the paddle tensioner and carabiner dee piece provide superior lateral movement.
- An oversized dee ring and specially designed carabiner make climbing over obstacles easy.

Accessories for the Bucksqueeze (Sold Separately)



8' Retractable Lanyard, Model 5008-80F+N, mounts on the body belt & secures the user when climbing over obstacles.



A second positioning strap, 48119Y (see page 16), can also be used to secure the user when climbing over obstacles.



The BuckTooth, Model 485, is an accessory that must be installed when climbing iced poles.

*Brings a user into compliance with OSHA 1910.269 (g)(2)(v) requirements.

BUCK TRAINER

The Buck Trainer is a reliable apprentice fall protection 5000 lb. anchor that rotates 250°. It can be attached to any pole up to a 9" diameter at any height by a qualified climber and a groundman. This unit is ideal to transport to remote areas to field test potential apprentices before sending them to the actual training facility.

Benefits and specifications of the Buck Trainer

- Fits a pole with diameter up to 9"
- Mounts anywhere on pole
- Rotates 250°
- Keeps climber 36" from pole
- Tested to 5000 lbs.

included


- Ratchet strap to lift Buck Trainer with handline
- Bolts and nuts
- Mounting brackets
- Carabiner to mount lifeline (5005L1)

*For Retractable Lifelines see page 18.



BUCKSQUEEZE MODEL 483D

(For distribution poles up to a 50" circumference)

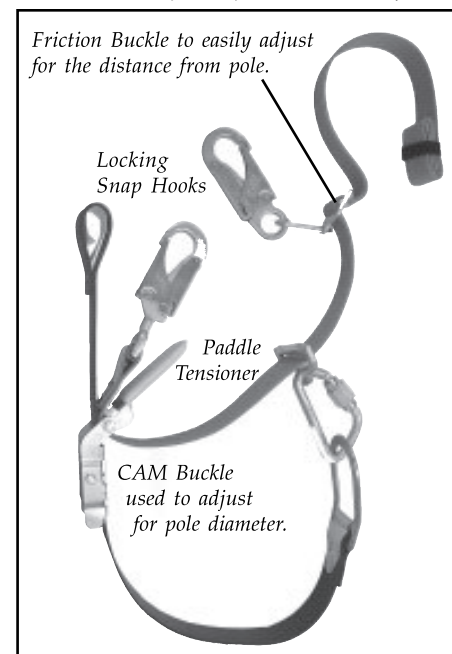

Order 484T for transmission poles up to a 90" circumference.

5204




273 Weymouth Street, Rockland, MA 02370
Phone 781-871-1920 • Fax 781-878-1507 • www.hydroninc.com

HYDRON INCORPORATED

RETRACTABLE LANYARDS

The retractable lanyard automatically extends and retracts to allow user mobility. This unit utilizes an inertia-brake mechanism which locks when 5" of material pulls out per second to restrain the worker to a fall of less than 12".

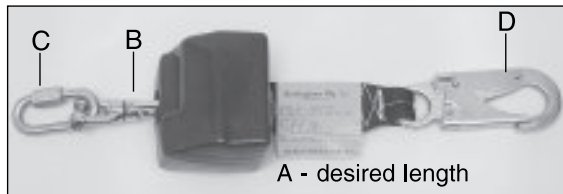

Fall Arrest

5008-81EL



5008	A	B	C	D
RETRACTABLE UNIT	LENGTH IN FEET	SWIVEL	CONNECTING DEVICE-FRAME END	CONNECTING DEVICE-LANYARD END
	6	0 = NONE	0 = None	0 = None
	8	1 = 5/16 Swivel w/ Bolt	A = Aluminum Carabiner Self-Locking 5005SA	A = Aluminum Carabiner Self-Locking 5005SA
	10	2 = 5/16 Swivel w/ Std. Pin	D = Steel Carabiner Self-Locking 5005	D = Steel Carabiner Self-Locking 5505
			E = Quick Link	R = Ladder Snap 3130
			F = Bracket to Attach Retrieval Unit to BodyBelt	V = 1706 Locking Snaphook
			V = 1706 Locking Snaphook	Z = Ladder Snap 3129
			+1 = Attached to 3809R	
			2 = Dee ring	
			8 = 1704 Swivel Snap	
			R = 2 1/4" Ladder Hook 3130	

Dual Retractable Lanyard

The Buckingham dual retractable lanyard is made of two retractables, a shock absorbing lanyard, two steel carabiners, and two aluminum carabiners.



5008-D

POPULAR MODELS




5008-80FV



Swivel Plate
Steel Retractable Lanyard Mounting Bracket
Min. tensile strength 5000 lbs.



5008-101EV

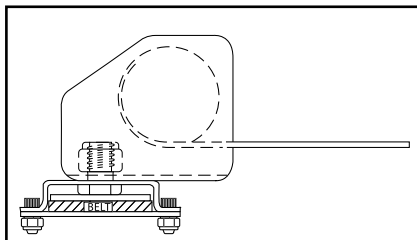

+B = 1 3/4" capacity
+D = 2" Capacity

*For use with Buck Squeeze Wood Pole fall protection device.



5008-10DR



5008-80+1V

For use in an aerial lift truck. Attach directly to boom.



Retractable Lanyard that mounts to the boom.

273 Weymouth Street, Rockland, MA 02370
Phone 781-871-1920 • Fax 781-878-1507 • www.hydroninc.com