

HYDRON INCORPORATED

DURA-WEB NYLON SLINGS



Best in Abrasion Resistance

Available in two strength classes, all Dura-Web slings feature premium abrasive resistant yarns covering all surfaces, for extended sling life and long term value.

Dura-Web Features, Advantages and Benefits

Promotes Safety

- Red core yarn warning system aids in the inspection process
- Striped webbing helps identify proper capacity
- Tuff-Tag provides serial numbered identification for traceability

Saves Money

- Abrasion resistant fibers cover both faces and edges for greater sling life
- Tuff-Tag provides required OSHA information for the life of the sling, not just the life of the tag.

Saves Time


- Striped capacity for quick identification

Dura-Web 2000 Capacity

Two stripes = 2,000 lbs. per inch of width (one ply only). 25% stronger than other webbing. The strongest abrasion resistant sling available.

Eyes of Dura-Web 2000 slings for Types 3-4-5 are not tapered in any width.


Dura-Web slings meet or exceed OSHA and ASME B30.9 requirements.



Dura-Web 1000 Capacity

One Stripe = 1,000 lbs. per inch of width (one ply only). The only light duty web sling with an abrasive resistant surface. Wider bearing surface, per capacity, helps protect load surface.

Dura-Web slings meet or exceed OSHA and ASME B30.6 requirements.



LINE
CONSTRUCTION
TOOLS

Code	Web Width (in.)	Rated Capacity (lbs.)*			
		Vertical	Choker	V. Basket	
Type U					
One Ply	UU1-202	2	4,000	3,200	8,000
	UU1-203	3	6,000	4,800	12,000
	UU1-204	4	8,000	6,400	16,000
Two Ply	UU2-202	2	8,000	6,400	16,000
	UU2-203	3	10,800	8,600	21,600
	UU2-204	4	14,400	11,500	28,800
		Type 3	Type 4		
One Ply	EE1-201	1	2,000	1,600	4,000
	EE1-202	2	4,000	3,200	8,000
	EE1-203	3	6,000	4,800	12,000
	EE1-204	4	8,000	6,400	16,000
Two Ply	EE2-201	1	4,000	3,200	8,000
	EE2-202	2	8,000	6,400	16,000
	EE2-203	3	10,800	8,600	21,600
	EE2-204	4	14,400	11,500	28,800
Type 5					
One Ply	EN1-201	1	4,000	3,200	8,000
	EN1-202	2	8,000	6,400	16,000
	EN1-203	3	12,000	9,600	24,000
	EN1-204	4	16,000	12,800	32,000
Two Ply	EN2-201	1	7,800	6,200	15,600
	EN2-202	2	15,200	12,200	30,400
	EN2-203	3	20,400	16,300	40,800
	EN2-204	4	25,800	20,600	51,600

Code	Web Width (in.)	Rated Capacity (lbs.)*			
		Vertical	Choker	V. Basket	
Type U					
One Ply	UU1-102	2	2,000	1,600	4,000
Two Ply	UU2-102	2	4,000	3,200	8,000
		Type 3	Type 4		
One Ply	EE1-101	1	1,000	800	2,000
	EE1-102	2	2,000	1,600	4,000
Two Ply	EE2-101	1	2,000	1,600	4,000
	EE2-102	2	4,000	3,200	8,000
Type 5					
One Ply	EN1-101	1	2,000	1,600	4,000
	EN1-102	2	4,000	3,200	8,000
Two Ply	EN2-101	1	3,900	3,100	7,800
	EN2-102	2	7,600	6,100	15,200

*WARNING

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°

320 Libbey Industrial Parkway, Weymouth, Massachusetts 02189
Phone 781-331-5500 • Fax 781-331-5508 • www.hydroninc.com


WEB SLINGS

LIFTEX INC.

ROUNDUP® ROUND SLINGS ENDLESS SLINGS (ENR)

Liftex Endless-Type Roundslings are the most basic roundslings, yet they offer great versatility. Endless roundslings may be used in a vertical, choker or basket type hitch.


- Sling life extended through rotation of bearing points
- Soft and Pliable conforms well to irregularly shaped loads
- Offers tighter choke with easier release
- Double Jacket protects load-bearing fibers
- Tagged for easy identification
- Red Core Warning Fibers alert user to damage
- Elongation approximately 3% at Rated Capacity

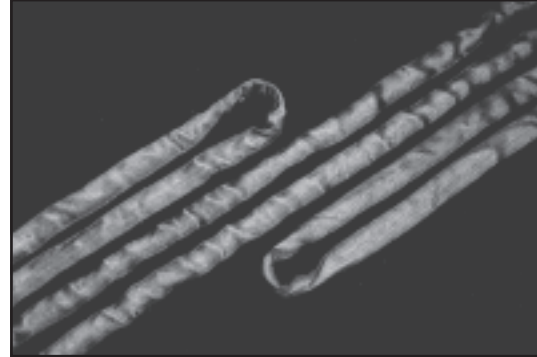

No.	Color Code	Capacity			Min Length	Diameter (No Load)	Weight per foot
		Vertical	Choker	Vertical Basket			
ENR1	Purple	2600	2100	5200	3'	0.625"	0.3 lb.
ENR2	Green	5300	4200	10600	3'	0.875"	0.4 lb.
ENR3	Yellow	8400	6700	16800	3'	1.125"	0.5 lb.
ENR4	Tan	10600	8500	21200	3'	1.125"	0.6 lb.
ENR5	Red	13200	10600	26400	3'	1.375"	0.8 lb.
ENR6	White	16800	13400	33600	6'	1.375"	0.9 lb.
ENR7	Blue	21200	17000	42400	6'	1.625"	1.3 lb.
ENR8	Orange	25000	20000	50000	6'	1.750"	1.6 lb.

*To order specify number and length (ft.)

WARNING *DO NOT EXCEED RATED CAPACITY

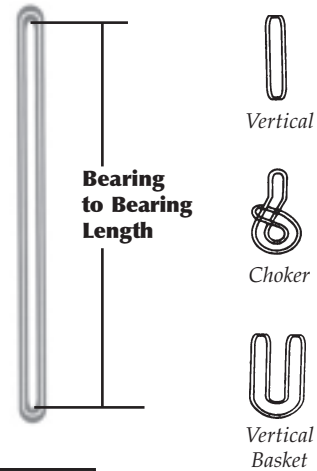

EYE TO EYE (EER)

Liftex Eye & Eye-Type roundslings are ideal where abrasion to the sling body is a problem. A tough, abrasion-resistant nylon sleeve is sewn to the body forming a loop or eye at each end. They may be used in a vertical, choker or basket hitch.


- Capacities are color coded
- Double Jacket under body cover protects load-bearing yarns
- Stretch is reduced to approximately 3% at rated capacity
- Red Core Warning Fibers alert user to damage



No.	Color Code	Capacity			Min Length	Standard Eye Length	Body Width	Weight per foot
		Vertical	Choker	Vertical Basket				
EER1	Purple	2600	2100	5200	3'	10"	2.25"	0.4 lb.
EER2	Green	5300	4200	10600	3'	10"	2.50"	0.5 lb.
EER3	Yellow	8400	6700	16800	4'	12"	2.50"	0.6 lb.
EER4	Tan	10600	8500	21200	4'	12"	3.50"	0.7 lb.
EER5	Red	13200	10600	26400	5'	14"	3.50"	1.0 lb.
EER6	White	16800	13400	33600	7'	16"	3.50"	1.1 lb.
EER7	Blue	21200	17000	42400	7'	16"	4.25"	1.6 lb.

*To order specify number and length (ft.)

WARNING *DO NOT EXCEED RATED CAPACITY

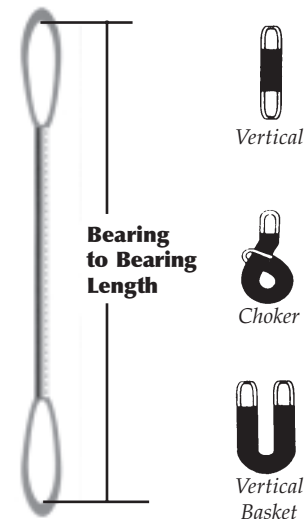

**LINE
CONSTRUCTION
TOOLS**

**320 Libbey Industrial Parkway, Weymouth, Massachusetts 02189
Phone 781-331-5500 • Fax 781-331-5508 • www.hydrone.com**