


# HYDRON INCORPORATED



## HAND LINE BLOCKS

- Block and sheave constructed of rugged nylon fiberglass reinforced high di-electric material.
- Reinforced 1/2" diameter axle and swivel bearings.
- 3" sheaves—block can accommodate rope thru 5/8" dia.
- Provided with either side opening or closed block.
- Blocks are rated with 3-1 safety factor.\*

\*Recommended safe working load 1,000 lbs.

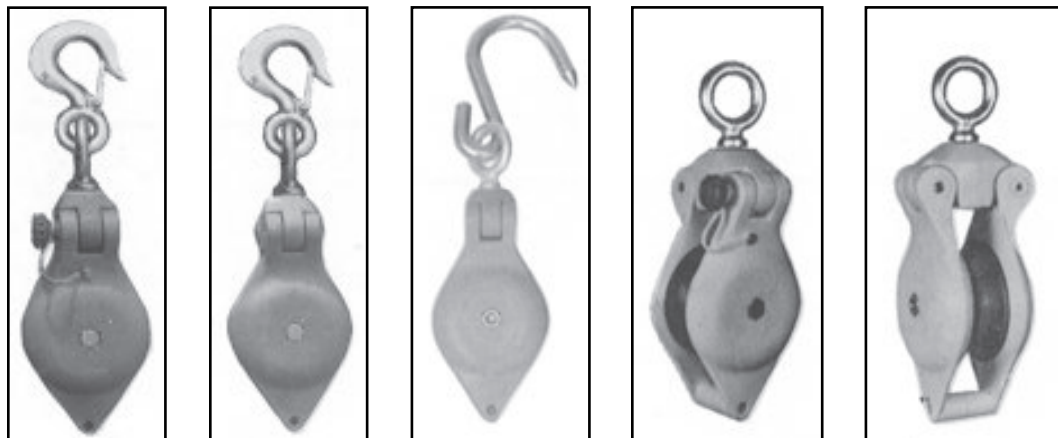

No. 3550

No. 3551

No. 3551-1

No. 3553

No. 3554

\*Recommended safe working load 1,000 lbs.

No.	Description	Wt.
3550	Side Opening Block w/Swivel Hook and Safety Snap	1 3/4 lbs
3550-1	Side Opening Block w/Swivel Meat Hook	1 3/4 lbs
3551	Closed Block w/Swivel Hook and Safety Snap	1 3/4 lbs
3551-1	Closed Block w/Swivel Meat Hook	1 3/4 lbs

No.	Description	Wt.
3553	Side Opening Block w/Swivel Eye Only	1 1/4 lbs
3554	Closed Block w/Swivel Eye Only	1 1/4 lbs
10-147	Meat Hook only for blocks	1 lb

LINE CONSTRUCTION TOOLS

## COMPLETE HAND LINES



Complete Hand Lines with your choice of above insulating blocks—Nos. 3550 or 3551. Includes length of 1/2" polypropylene rope. Hand Line Hook No. P10060 and Hand Line Snap No. P30142.

Hand Line No. 3550 Block				Hand Line No. 3551 Block			
No.	Working Height	Overall Rope Length	Wt.	No.	Working Height	Overall Rope Length	Wt.
3555	30 feet	60 feet	5 lbs	3558-1	30 feet	60 feet	4 1/2 lbs
3556	40 feet	80 feet	5 1/2 lbs	3559-1	40 feet	80 feet	5 lbs
3557	50 feet	100 feet	6 lbs	3560-1	50 feet	100 feet	5 1/2 lbs

273 Weymouth Street, Rockland, MA 02370  
Phone 781-871-1920 • Fax 781-878-1507 • www.hydroninc.com