

HYDRON INCORPORATED

PORTABLE DRILL

TANAKA®

- **26cc, 1.3 hp engine** features two piston rings and a stress relieved, chrome plated cylinder for long engine life.
- **Powered reversing feature** allows you to instantly reverse drilling with a push of a lever.
- **Portable and lightweight** drill anywhere and in any position without the hassles of electrical cords or generators.
- **1/2 inch chuck capacity** accepts a wide variety of wood, steel, or concrete bits.
- **Dual position front handle** allows the handle to be mounted on either side of the unit for added versatility.
- **1/2/5 Warranty Coverage** provides **One Year** coverage for professionals, **Two Year** coverage for Homeowners, and **Five Years** on the Electronic Ignition Module.



262R

Specifications

| | |
|----------------------------|------------------------------------|
| Engine Displacement cc | 26.1 |
| Power (hp) | 1.3 @ 8500 rpm |
| Carburetion | Walbro Diaphragm |
| Ignition System | Transistorized Electronic |
| Fuel Tank Capacity/fl. oz. | 17.0 |
| Front Handle | 2 Position/Adjustable |
| Clutch System | Centrifugal |
| Reduction Ratio | 20:1 |
| Chuck Speed | 0-450 rpm |
| Chuck Capacity | 1/2" |
| Drill Bit Capacity | 1" wood, 1/2" steel, 1/2" concrete |
| Dry Weight/lbs | 11.0 |

Optional Accessories:

| | |
|---------------|-----------------------------------|
| 27218 | Keyless Chuck |
| 076-32430-201 | Auger Bit Adapter (2" only) |
| Sizes Vary | Pole Wood, Masonry, Railroad Bits |
| Sizes Vary | Bulb Planting Bits |
| Sizes Vary | Perfect Mix™ 2-Cycle Engine Oil |

**Utility Tool
and Body Co., Inc.**

COLLAPSIBLE REEL


Type CR. The Bell System designed this reel for use in picking up wire in neat coils. The reel attaches to the winch shaft by means of bayonet type socket. Unit is to be put on the winch shaft applying force toward the center of the truck to compress the spring and turning the unit to lock. The design of the unit is such that after the wire is coiled up on it, the quick acting handle is used to collapse the outer rim of the pick-up reel allowing the picked up wire to be removed. Maximum pulling force, 4,000 lbs. Capacity, 1,600 ft. of 1/4" wire rope or 200 lbs. of wire or cable.

Specification:

Drum diameter: 20"
Overall diameter: 28"
Throat (between flanges): 6"
Winch shaft diameter: 2 7/16"
Weight: 70 lbs.



176-A-78

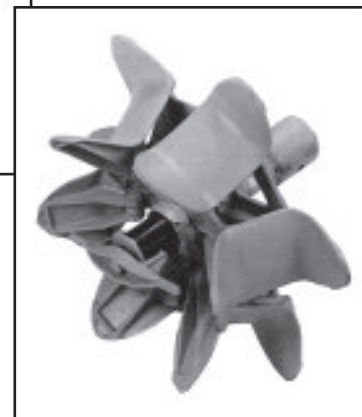

LINE
CONSTRUCTION
TOOLS

320 Libbey Industrial Parkway, Weymouth, Massachusetts 02189
Phone 781-331-5500 • Fax 781-331-5508 • www.hydroninc.com