


HYDRON INCORPORATED

INSULATED PLATFORMS

- Hastings Fiber Glass Platforms are designed for maximum safety and ease of installation.
- Meet ASTM electrical requirements.
- The platforms are molded "channel Style" for maximum strength and have a smooth gel coat finish for easy cleaning.
- Multiple lengths available from 30" to 10 ft.
- Two types of rails to choose from. See next page
- Non-slip surface is built in for long life.
- Metal components are made from heat treated aluminum alloy. All platforms have kick boards.
- Meet ASTM mechanical requirements.

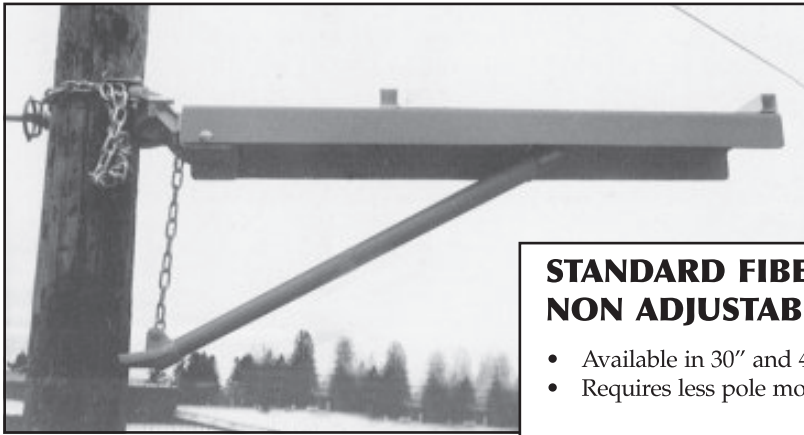

NOTE: ALL PLATFORM WIDTHS ARE 10-3/4"

STANDARD FIBER GLASS PLATFORMS NON ADJUSTABLE STYLE

- Available in 30" and 42" lengths
- Requires less pole mounting space than other types of platforms.

NO.	DESCRIPTION	WORKING LOAD LIMIT	WT.
8415	30" Platform complete with chain tightener	500 Lbs.	22 lbs
8416	42" Platform complete with chain tightener	500 Lbs.	26 lbs

**LINE
CONSTRUCTION
TOOLS**

ADJUSTABLE STYLE FIBER GLASS PLATFORM

- Available in 4', 6', 8' and 10' lengths.
- Twin adjustable struts for stability. Struts hinge for storage.

NO.	DESCRIPTION	WORKING LOAD LIMIT	WT.
8401	4' Adjustable Platform with braces & chain tightener	500 Lbs.	32 lbs
8402	6' Adjustable Platform with braces & chain tightener	500 Lbs.	37 lbs
8403	8' Adjustable Platform with braces & chain tightener	300 Lbs.	42 lbs
8404	10' Adjustable Platform with braces & chain tightener	275 Lbs.	47 lbs




320 Libbey Industrial Parkway, Weymouth, Massachusetts 02189
Phone 781-331-5500 • Fax 781-331-5508 • www.hydroninc.com

HYDRON INCORPORATED

PLATFORM RAILINGS


TRIPOD FIBER GLASS RAIL

- The tripod railing is designed to be used with 42" and 48" platforms only. The tripod railing allows linemen to move freely when rubber gloving.
- Unit hinges and stores on top of the platform by removing the "keeper" pin.
- Fiber Glass rail members are tested per ASTM F-711.

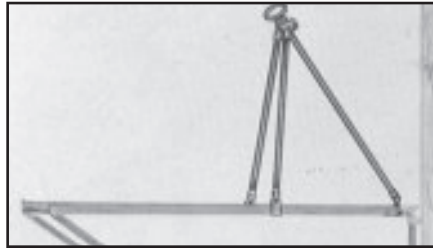

NO.	DESCRIPTION	WT.
"A"	Tripod Rail to fit 42" or 48" platform	6 lbs

**Add "A" to any of the previously illustrated platforms.*

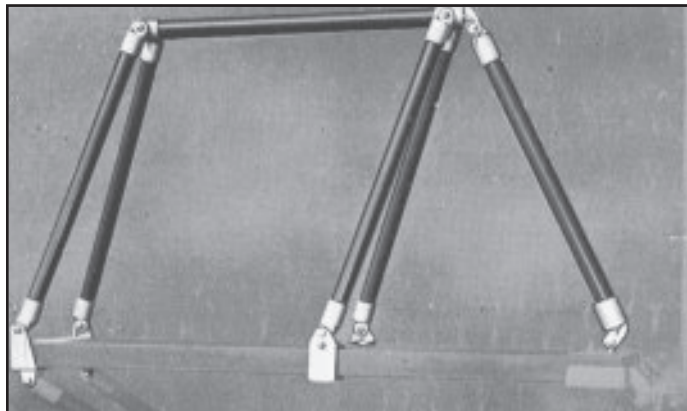

HORIZONTAL FIBER GLASS RAIL

- The Horizontal Railing is designed to be used with platforms 4', 6', 8' and 10' long.
- Unit hinges and stores on top of the platform by removing the "keeper" pin.
- Fiber Glass rail members are tested per ASTM F-711.

NO.	DESCRIPTION	WT.
"B"	Horizontal Fiber Glass Rail for 4', 6', 8' or 10' Fiber Glass Platform	10.4 lbs

**Add "B" to any of the previously illustrated platforms.*

LINE
CONSTRUCTION
TOOLS

320 Libbey Industrial Parkway, Weymouth, Massachusetts 02189
Phone 781-331-5500 • Fax 781-331-5508 • www.hydroninc.com