


# HYDRON INCORPORATED

## SHOCK-ABSORBING LANYARDS



### Buck Arrest

6VV116

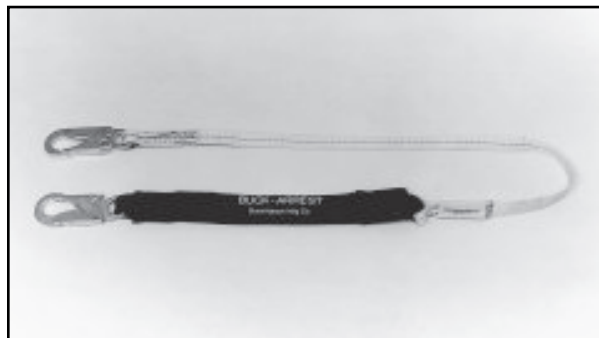

### Buck Stop

54V716



Available in fixed or adjustable length

6VV116 - Fixed length 6 ft. with 1706 both ends

64V126 - Adjustable length - maximum 6 ft. with 1706 snap and loop to half-hitch to harness

64V716 - 6 ft. stretch with 1706 snap and loop to half-hitch to harness

5VV116 - Fixed length 6 ft. with 1706 both ends

54V126 - Adjustable length - maximum 6 ft. with 1706 snap and nylon loop to half-hitch to harness

54V716 - 6 ft. stretch with 1706 snap and nylon loop to half-hitch to harness

### Buckstop 5V+K116 w/RotoSnap

\*Other lengths available. Please contact us for part number.



Now You Can Tie-back with Confidence! A captive eye steel snap with a minimum tensile load of 10,000 lbs. and a gate/side load minimum of 5000 lbs.




Model 1711 (Option +K)  
Alloy Steel RotoSnap  
43/64" gate opening  
5 3/16" long

11.2 oz. weight  
Min. tensile strength 10,000 lbs.  
Min. gate/side load 5000 lbs.


5V+K116 Buckstop Lanyard with Roto-Snap Carabiner.

### Dual Lanyard

546716RDR enables the user to be 100% fall protected while ascending, working and descending steel structures.

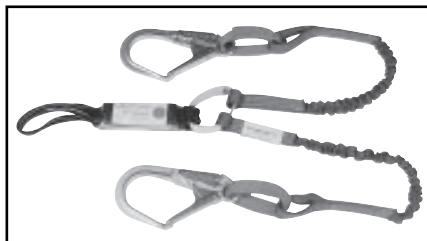

546716RDR

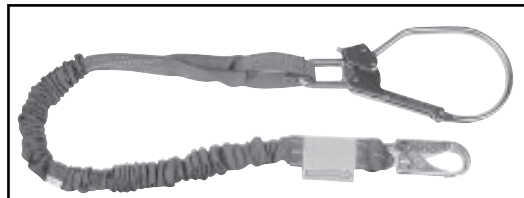

8VB716R

### Buckyard Stretch w/Large Hook and Rescue Hook

8VB716R features a stretch core that reduces its overall length when working and climbing, keeping excess material from becoming a hindrance to the user.

273 Weymouth Street, Rockland, MA 02370  
Phone 781-871-1920 • Fax 781-878-1507 • [www.hydroninc.com](http://www.hydroninc.com)