

# HYDRON INCORPORATED

## SNAPS AND HARDWARE



### A locking snap hook that works like a non-locker.

A rope snap made to work like a non-locker. The interior lock mechanism does not allow the unit to malfunction due to bent tabs. A bent tab is a typical problem on old locking snap hooks. Also, the design has a wider opening to ease connecting and detaching to the dee rings. The hinge points are located to make operation easy. Tip of bill to body opening is 1 5/16". Overall length is 6". Rated to 5000 pounds.

**1706 Locking Rope Snap**  
(Option V)



**3032L Spreader Snap Hook**  
1" eye (I.D.)  
9" long  
5/8" opening  
Rated to 5,000 pounds




**1704 (Option 8)  
Swivel Locking Rope Snap**  
1" wide eye  
13/16" opening  
7 1/16" long  
Rated to 5000 lbs.



**1708 Aluminum Body Locking Rope Snap Hook (Option +6)**  
7/8" eye (I.D.)  
.718" opening  
5 1/4" length  
5.4 oz. weight  
Rated to 5,600 pounds



**3129 Small Locking Ladder Snap (Option Z)**  
1" eye (I.D.)  
1.750" opening  
8 1/8" length  
1 lb. 3 oz. weight  
Rated to 5,000 pounds

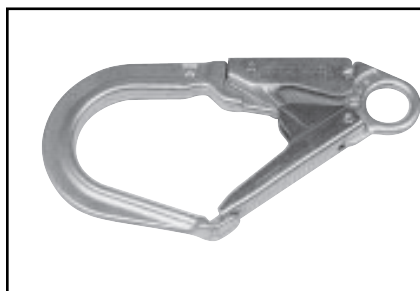

**3130 Large Locking Ladder Snap (Option R)**  
1" eye (I.D.)  
2.500" opening  
9 3/4" length  
1 lb. 8 oz. weight  
Rated to 5,000 pounds



**3034 (Option B)  
Large Locking Rebar Hook**  
15/16" eye (I.D.)  
3 11/32" opening  
13" length  
Rated to 3968 lbs.  
(Only to be used on shock absorbing style lanyards)



**Thimbles**  
5/8" 350411 plastic  
1/2" 350410 plastic  
1/2" 350408 metal  
1/2" 350409 metal



**5009 Figure 8 without Ears**  
**5009E Figure 8 with Ears**

273 Weymouth Street, Rockland, MA 02370  
Phone 781-871-1920 • Fax 781-878-1507 • [www.hydrone.com](http://www.hydrone.com)

# HYDRON INCORPORATED



CLIMBING/FALL  
PROTECTION  
EQUIPMENT & PPE

## CARABINERS



**5005SA Auto Lock Aluminum Carabiner**

Length – 4 1/2"  
Opening – 3/4"  
Breaking Strength – 6700 lbs.



**1710 Auto Lock Aluminum Carabiner**

Length – 5 1/2"  
Opening – 3/4"  
Breaking Strength – 7000 lbs.



**5005SAE Auto Lock Aluminum Carabiner with eye (Option U)**

Length – 5 1/4"  
Opening – .71"  
Breaking Strength – 5620 lbs.



**5005 Auto Lock Steel Carabiner**

Length – 4 1/2"  
Opening – 1"  
Breaking Strength – 10,116 lbs.



**\*5005M Screw Gate Steel Carabiner**

Length – 4 1/2"  
Opening – 1"  
Breaking Strength – 11,240 lbs.



**\*5005T Twist Lock Steel Carabiner**

Length – 4 1/4"  
Opening – 1"  
Breaking Strength – 8,992 lbs.



**5555SA Ball Lock Aluminum Carabiner**

Length – 4 1/4"  
Opening – .91"  
Breaking Strength – 6295 lbs.



**5555WSA William Ball Lock Aluminum Carabiner**

Length – 4 1/2"  
Opening – 1"  
Breaking Strength – 5625 lbs.



**\*5005NA Non-Locking Aluminum Carabiner**

Length – 4 1/2"  
Opening – 1 3/16"  
Breaking Strength – 5000 lbs.



**\*5005NIA Non-Locking Aluminum Carabiner**

Length – 4"  
Opening – .78"  
Breaking Strength – 5172 lbs.



**\*5005NK Non-Locking Key Chain Carabiner**

Length – 3"  
Opening – 1/2"  
Breaking Strength – Not Rated

**\*WARNING: Not intended for human support or fall protection.**

**273 Weymouth Street, Rockland, MA 02370**  
**Phone 781-871-1920 • Fax 781-878-1507 • www.hydroninc.com**