


HYDRON INCORPORATED

7.8/15KV LINE GUARDS



Polyethylene Line Guards 7.8/15KV

- Light Weight Polyethylene Line Guards
>(1/3 the weight of similar rubber hoses.)
- Rated @ 7.8 KV Phase to Ground (Brush Contact Only) And 15 KV Phase to Phase (Brush Contact Only)
- Line Guards meet both ASTM F-712 and F-968, Class 2, Electrical Requirements
- Available in Two Lengths, 6' and 5' models
- High Visibility Yellow Color
- Snap Together feature with male and female connecting ends
- Smooth polyethylene surface, easy to clean
- Features a larger I.D. than traditional rubber hoses (1.77 inches compared to 1.25 inches)
- Conductor Clamp Pin available to keep guards from sliding down the conductor

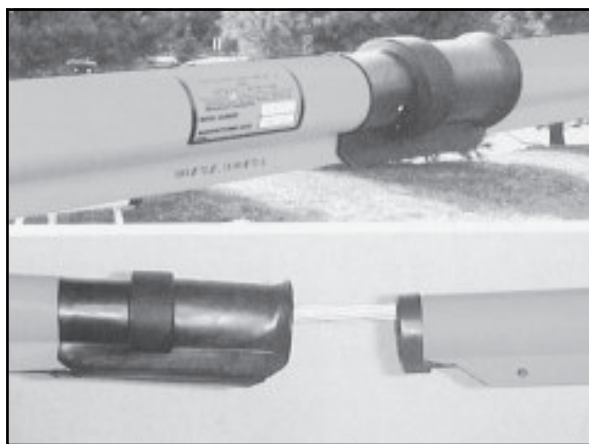

Important Notice to End User!

- This product has a black inner layer and yellow outer layer of material.
- If either layer should wear in such a manner that the color from the opposite layer is visible, the product must be taken out of service immediately.
- This product design was electrically tested per ASTM specifications prior to leaving the factory.
- Moisture, dirt and contamination can reduce dielectric properties, therefore it is important to ...
ALWAYS: Follow approved work and safety procedures
ALWAYS: Wear recommended safety equipment
ALWAYS: Be sure this product is clean, dry, and functional before using.

Ordering Information

| No. | Description | Dimensions | Wt. |
|--------|--------------------------------|-----------------|-----------|
| 6060 | 6 Foot Polyethylene Line Guard | 6' X 1.77" I.D. | 2.30 lbs. |
| 6050 | 5 Foot Polyethylene Line Guard | 5' X 1.77" I.D. | 1.90 lbs. |
| A30321 | Conductor Clamp (Blanket Pin) | 9.5" X 5" Jaw | .25 lbs. |
| A30322 | Conductor Clamp w/eyes | 9.5" X 5" Jaw | .25 lbs. |

273 Weymouth Street, Rockland, MA 02370
Phone 781-871-1920 • Fax 781-878-1507 • www.hydroninc.com